
Heavy Duty Walk-Through FrameProduct Selection Guide





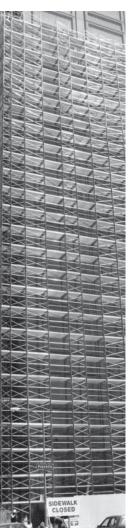


Features Highest Load Rating in the U.S.


- 20,000 lb. scaffold frame load capacity (10,000 lb. per leg) when braced in accordance with Safway requirements
- 7' height provides more head room and requires fewer lifts
- Accepts 3 standard hook-on decks
- Larger diameter tubing gives higher load capacity
- Available in 3′, 5′, and 7′ heights; nominal width 5′
- 16,000 lb. per leg load capacity when used in shoring applications



Heavy Duty Walk-Through Frame

Components					
Part No.	Description	Width	Length	Height	Weight
HDF07	Heavy Duty Open Frame, 7'	61" ref.		83" ref.	84.6 lbs.
HDBR20	Heavy Duty Side Bracket, 20"	20¼"		23 ¹³ / ₁₆ "	11.6 lbs.
HDBTB12	Wall Tie Bracket, 12"	12"			5.75 lbs.
HDBTB6	Wall Tie Bracket, 6"	6"			4.75 lbs.
HDCP	Coupling Pin				2 lbs.
HD7HD	Horizontal Diagonal Brace, 7'		96"		15.3 lbs.
HD5HD	Horizontal Diagonal Brace, 5'		75%"		12.2 lbs.
HDJC	Screw Jack Sleeve			30"	9 lbs.
SJBPX	Heavy Duty Screw Jack and Base Plate	7"			18.9 lbs.

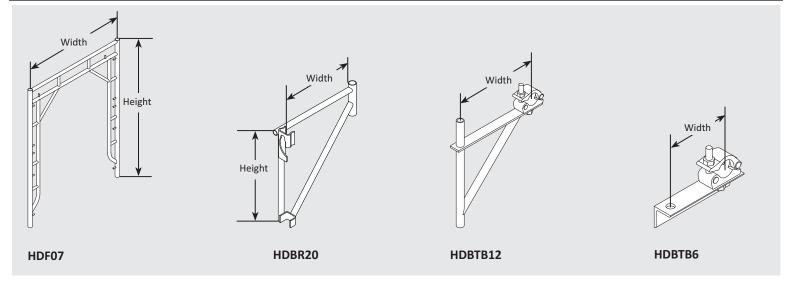

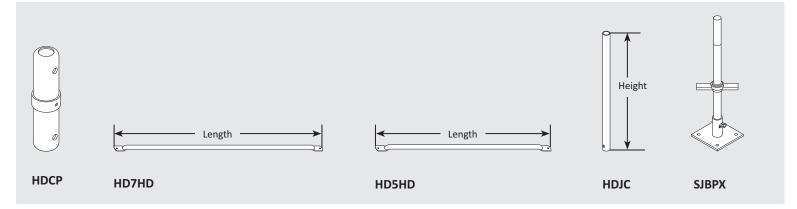

All drawings on this sheet are for illustrative purposes only. This sheet is intended for general information purposes only. Because of the many variables which affect the performance of the product line, some of the information in this brochure may not apply. For specific applications, contact Safway.

Note: All scaffolds shall be erected, modified and dismantled only under the supervision of a Competent Person. Erection, use, maintenance and disassembly must conform to current manufacturer's instructions as well as all federal, state, provincial and local regulations. Copies of complete Safety Guidelines for these and other products are available from Safway without charge.

Safway Services, LLC

Corporate Headquarters N19 W24200 Riverwood Drive Waukesha, WI 53188 Toll free: (800) 558-4772 Telephone: (262) 523-6500 For a list of branch locations in the United States and Canada, visit our website at www.safway.com

©2010 Safway Services, LLC. All rights reserved.

ORN 106 Rev. B 1/10

