


# Adjustable Sloped Stirrup

## Technical Data Guide

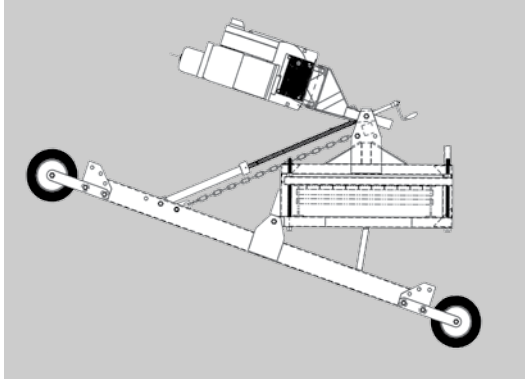

### Adjustable Sloped Stirrup

Part No.	Dimensions	Max. Capacity	Weight
VVSSL135001S	96" x 8" x 48"	1,000 lbs.	170 lbs.

#### Areas of Use

Access to sloped roofs, angular buildings, large domes or airplane hanger roofs can be achieved with the Sloped Stirrup.

#### Savings

Time and expense will be saved when using the stirrup because it takes the place of designing and fabricating specialized equipment for individual jobs.

#### Versatile

The Sloped Stirrup is adjustable from 20 degrees through 90 degrees measured from the horizontal.

All drawings on this sheet are for illustrative purposes only. This sheet is intended for general information purposes only. Because of the many variables which affect the performance of the product line, some of the information in this brochure may not apply. For specific applications, contact Safway.

NOTE: All scaffolds shall be erected, modified and dismantled only under the supervision of a Competent Person. Erection, use, maintenance and disassembly must conform to current manufacturer's instructions as well as all federal, state, provincial and local regulations. Copies of complete Safety Guidelines for these and other products are available from Safway without charge.

#### Safway Services, LLC

Corporate Headquarters  
N19 W24200 Riverwood Drive  
Waukesha, WI 53188  
Toll free: (800) 558-4772  
Telephone: (262) 523-6500

For a list of branch locations in the United States and Canada, visit our website at [www.safway.com](http://www.safway.com)

